

**Model No. DPFN-660-XFYPZ
660nm DPSS LASER UP TO >400mW**

The DPFN-series 660nm LD pumped all-solid-state laser is constructed with features of high stability, low noise option, FDA compliance, ultra-compactness, long lifetime and low cost. It is widely used in scientific research, measurement, spectrum analysis, and many other applications.

SPECIFICATIONS

Model No.	DPFN-660-XFYPZ
Wavelength (nm)	660±1
Output power (mW)	>200 (X=200), >300 (X=300), >400 (X=400)
Transverse mode	Near TEM ₀₀
Operating mode	CW
Power stability (rms, over 4 hours)	<10% (P=B), <5% (P=A), 3% (P=E)
Noise of amplitude (rms, 20Hz-20MHz)	<1% for Low Noise (Z=1); >1% (Z=2)
Dimensions of beam at aperture (1/e², mm)	~2.0
Beam divergence, full angle (mrad)	<1.5
M² factor	<1.2
Polarization ratio	>100:1 Horizontal ±5 degree
Warm-up time (minutes)	<10
Beam height from base plate (mm)	27.4
Pointing stability after warm-up (mrad)	<0.05
Operating temperature (°C)	10~35
Laser head	197(L)×70(W) ×50(H)mm ³ ; 2.0kg
Power supply (90-240VAC)	High Power Elite Power Supply (Y=H): 236(L) ×145(W) ×104(H) mm ³ , 2.3kg with complete FDA compliant features, such as the turnkey switch and interlock, and easy to operate; CW mode **Note: If with Low Noise Z=1 , then only Y=H . High Power Laboratory Power Supply (Y=M): 277(L) ×145(W) ×106 (H) mm ³ , 2.6kg with complete FDA compliant features, such as the turnkey switch and interlock, and more functions; CW mode with the adjustable output power knob, and operating current LED display
Expected lifetime (hours)	10,000
Warranty	10 months
Remarks	The laser head needs to be used on a heat sink with good heat dissipation.


Note: The above specifications are subject to change without notice.





Mechanical Outline (unit: mm)


Laser Head

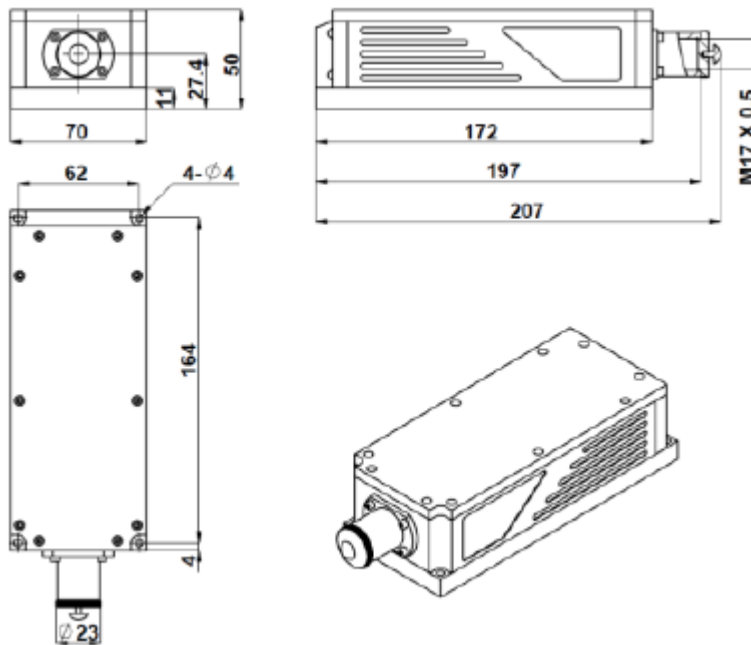

Power Supply

High Power Elite Power Supply (Y=H)

High Power Laboratory Power Supply (Y=M)

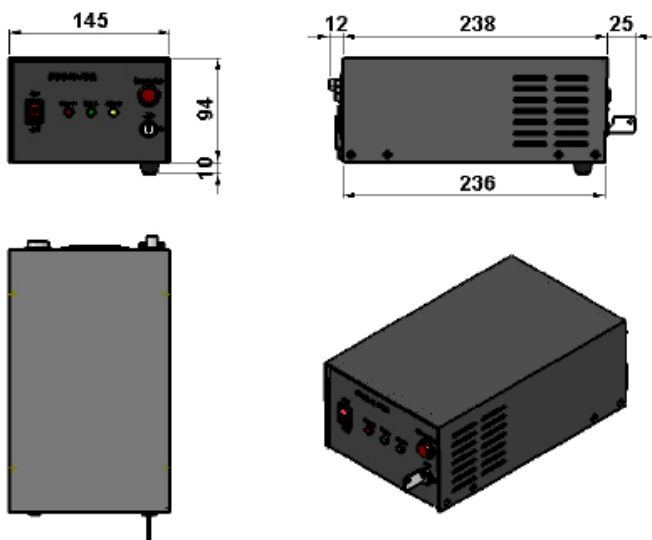

Note: The above specifications are subject to change without notice.

