



Model No. FCL-915-P-XWD-YZ

915nm HIGH POWER FIBER COUPLED INFRARED DIODE LASER SYSTEM UP TO ~100W




The FCL-series 915 nm high power fiber coupling infrared diode laser system has integrated laser diode, fiber coupling optics, laser power supply, LD current and temperature control in one box. Its compact dimension and convenient functions, including but not limited to the power adjustment, temperature control and LED display make it very suitable for pumping, scientific research, industrial and medical applications.

SPECIFICATIONS

A. For Output Power less than ~50W:

<b>Model No.</b>	<b>FCL-915-P-XWD-YZ</b>	
<b>Wavelength (nm)</b>	915±5	
<b>Output power</b>	~30W (X=30)	
<b>Fiber connector</b>	SMA905	
<b>Fiber length (m)</b>	2.0	
<b>Fiber core diameter (µm)</b>	400	
<b>Fiber Numerical aperture</b>	0.22	
<b>Output power control</b>	0-100%, adjustable by knob	
<b>Power stability (rms, over 4 hours)</b>	<1%	
<b>Operating mode</b>	CW operating mode (Y=C); CW with external TTL modulation: 1Hz-1kHz (Y=T1), 1kHz-10kHz (Y=T2), 10kHz-30kHz (Y=T3); CW with external Analog modulation: 1Hz-1kHz (Y=A1), 1kHz-10kHz (Y=A2), 10kHz-30kHz (Y=A3).	
<b>LED display</b>	Laser diode current	
<b>Red pilot light</b>	No (Z=0); Yes (Z=1)	
<b>Operating temperature (°C)</b>	10~40	
<b>Cooling way</b>	Cooled by air, no water needed	
<b>Power supply</b>	Input voltage	90-240V AC, 50 to 60 Hz
	Dimensions	292(L) x326(W) x156(H) mm <sup>3</sup>
<b>Expected lifetime (hours)</b>	10,000	
<b>Warranty</b>	10 months	
<b>Remarks</b>	The laser can be run from 0-30kHz. However, the laser will be adjusted such that the waveform and performance is good at the requested specified range.	

PACKAGE DIMENSIONS (unit: mm)



Note: The above specifications are subject to change without notice.





**B. For Output Power ~50W and higher:**

<b>Model No.</b>	<b>FCL-915-P-XWD-YZ</b>
<b>Wavelength (nm)</b>	915±5
<b>Output power</b>	~60W (X=60), ~100W (X=100)
<b>Fiber connector</b>	SMA905
<b>Fiber length (m)</b>	2.0
<b>Fiber core diameter (µm)</b>	400
<b>Fiber Numerical aperture</b>	0.22
<b>Output power control</b>	0-100%, adjustable by knob
<b>Power stability (rms, over 4 hours)</b>	<1%
<b>Operating mode</b>	CW operating mode (Y=C); CW with external TTL modulation: 1Hz-1kHz (Y=T1), 1kHz-10kHz (Y=T2), 10kHz-30kHz (Y=T3); CW with external Analog modulation: 1Hz-1kHz (Y=A1), 1kHz-10kHz (Y=A2), 10kHz-30kHz (Y=A3).
<b>LED display</b>	Laser diode current, temperature, frequency and pulse
<b>Red pilot light</b>	No (Z=0); Yes (Z=1)
<b>Operating temperature (°C)</b>	10-30
<b>LD Temperature control range (°C)</b>	18-45, adjustable by knob
<b>Temperature stability (°C)</b>	±0.1
<b>Cooling way</b>	Cooled by air, no water needed
<b>Power consumption (KVA)</b>	<0.5
<b>Power supply</b>	Input voltage 200-240V AC
	Dimensions 406(L) x370(W) x186(H) mm <sup>3</sup>
<b>Expected lifetime (hours)</b>	10,000
<b>Warranty</b>	10 months
<b>Remarks</b>	The laser can be run from 0-30kHz. However, the laser will be adjusted such that the waveform and performance is good at the requested specified range.

**PACKAGE DIMENSIONS (unit: mm)**



**Note: The above specifications are subject to change without notice.**



## OPTIONAL ACCESSORIES

### FIBER COLLIMATOR



- COLLIMATOR WITH SPHERICAL LENS**

The collimator with spherical lens is designed to connect to the end of the FC/PC or SMA905 connector and contains an AR-coated spherical lens. The distance between the spherical lens and the tip of the FC-terminated fiber can be adjusted to compensate for focal length changes, or to re-collimate the beam at the specific wavelength and distance of interest.

**Model No. FC-SL-FC (for FC/PC connector)**

**Model No. FC-SL-SMA (for SMA905 connector)**

**Dimensions:**  $\phi 26\text{mm} \times 40\text{mm}$





- COLLIMATOR WITH ASPHERICAL LENS**

The collimator with aspherical lens is designed to connect to the end of the FC/PC or SMA905 connector and contains an AR-coated spherical lens. It is constructed with ultra-compact size and excellent performance, which is used to collimate the beam out of the fiber.

**Model No. FC-AL-FC (for FC/PC connector)**

**Model No. FC-AL-SMA (for SMA905 connector)**

**Dimensions:**  $\phi 11\text{mm} \times 23\text{mm}$

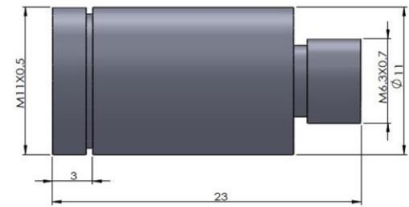

**Note:** The above specifications are subject to change without notice.