



**Model No. IMLH-800-XFYP2Q**  
**800nm INFRARED DIODE LASER SYSTEM UP TO >2500mW**

The IMLH-series 800 nm infrared diode laser is constructed with features of high stability, FDA compliance, ultra-compactness, long operating lifetime, cost-effectiveness and easy operation. It is widely used in measurement, spectrum analysis, communication, and many other applications. *In addition, fiber coupled IMLH-series 800nm diode lasers with FC or SMA905 connector are available upon request.*

**SPECIFICATIONS**

<b>Model No.</b>	<b>IMLH-800-XFYP2Q</b>
<b>Wavelength (nm)</b>	800±5
<b>Output power (mW)</b>	>1000 (X=1W), >2000 (X=2W), >2500 (X=2500)
<b>Transverse mode</b>	Multimode
<b>Operating mode</b>	CW
<b>Power stability (rms, over 4 hours)</b>	<1% (P=D)
<b>Dimensions of beam at aperture (mm)</b>	~5x8
<b>Beam divergence, full angle (mrad)</b>	<3.0
<b>Warm-up time (minutes)</b>	<5
<b>Beam height from base plate (mm)</b>	29
<b>Operating temperature (°C)</b>	10~35
<b>Laser head</b>	160(L) x77(W) x60(H) mm <sup>3</sup> , 0.9 kg
<b>Power supply (90-240VAC)</b>	<b>High Power Elite Power Supply (Y=H):</b> 275(L) x145(W) x104(H) mm <sup>3</sup> , 2.1kg; complete FDA compliant features (turnkey switch and interlock); easy to operate; CW mode with optional TTL or Analog modulation up to 30kHz  <b>High Power Laboratory Power Supply (Y=M):</b> 277(L) x145(W) x106(H) mm <sup>3</sup> , 2.3kg; complete FDA compliant features (turnkey switch and interlock) with more functions; CW mode with adjustable output power knob, operating current LED display, and optional TTL or Analog modulation up to 30kHz
<b>Optional modulation</b>	None (Q=0) <b>TTL:</b> 1Hz -1kHz (Q=1), 1kHz -10kHz (Q=2), 10kHz-30kHz (Q=5) <b>Analog:</b> 1Hz -1kHz (Q=3), 1kHz -10kHz (Q=4), 10kHz-30kHz (Q=6)
<b>Expected lifetime (hours)</b>	10,000
<b>Warranty</b>	10 months
<b>Remarks</b>	The stability of output power may change when you adjust the output power. For example, the stability of output power at the maximum output power is <10%, the stability may change to >10% when you adjust the output power down.


**Note: The above specifications are subject to change without notice.**






MECHANICAL OUTLINE (unit: mm)

Laser Head

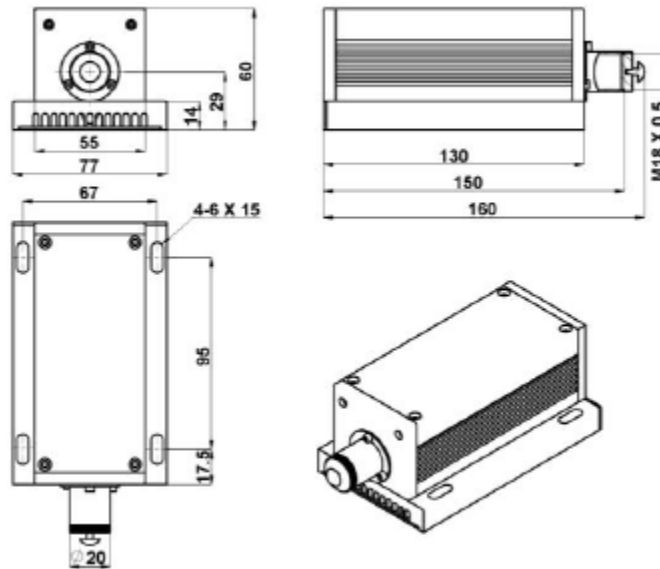


Power Supply

High Power Elite Power Supply (Y=H)

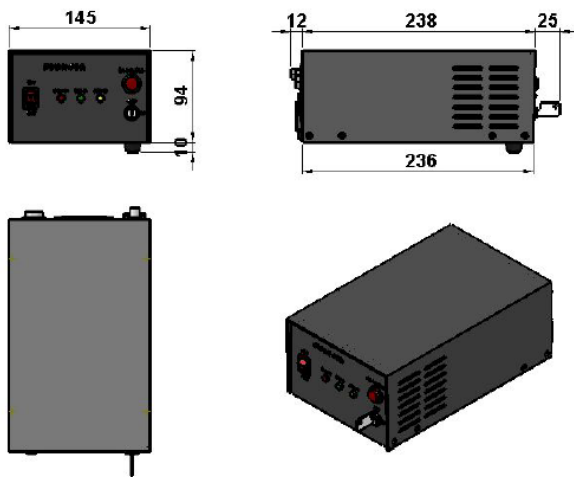

High Power Laboratory Power Supply (Y=M)

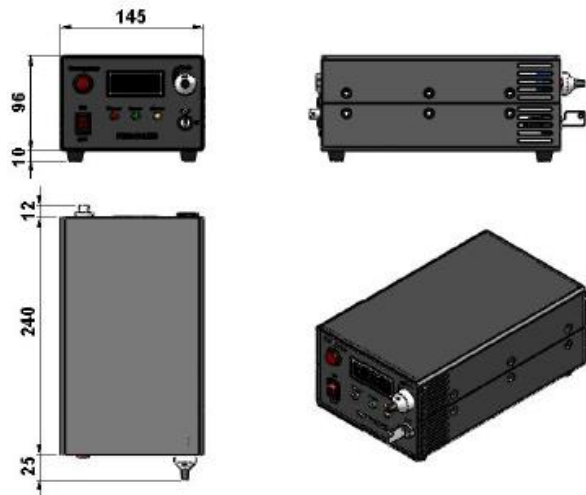

Note: The above specifications are subject to change without notice.